

BE

AIR-CONDITIONER



BGK1801-27

Compressor overload shut-off protection

Motor overheating protection

Compressor time delay program; two speed fan

Washable filters

360° direction wheel convenient for portable with lock

Appliances Area: Factory, office, Restaurant,

Warehouse, Computer room etc

Universal wheel design

All models are wheel-moving design, easy to install in corners and other small spaces.




Rear wheel with brake universal wheel.

Bucket design



Cold and heat separate design Improving cooling effect

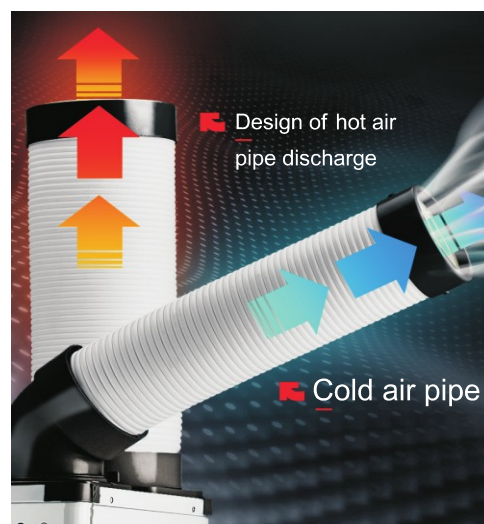

Design of hot air pipe discharge

Cold air pipe



BGK1801-45

BGK1801-65

Model	BGK1801-27	BGK1801-45	BGK1801-65	
Power	220-240V 50Hz	220-240V 50Hz	220-240V 50Hz	
Refrigerating capacity	KW	2.7	4.5	6.5
	BTU	9200	15300	22200
Cool air volume (m ³ /h)		460	800	1200
	(KW)	0.95	2	3
Current (A)	4.2	9	13.5	
Water Tank (L)	5	8	13	
product size (mm)	405 *430 *855	520 *480 *1035	630 *560 *1245	
packing size (mm)	484 *515 *965	610 *570 *1110	740 *660 *1730	
Additional parts box(mm)		370*350*260	380*280*515	
G.W. (Kg)	47	75	155	
N.W. (Kg)	42	70	100	
operation condition	18-45°C	18-45°C	18-45°C	